

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04L 12/56</p>	<p>A.</p>	<p>(11) International Publication Number: WO 96/19060 (43) International Publication Date: 20 June 1996 (20.06.96)</p>
<p>(21) International Application Number: PCT/CA95/00705 (22) International Filing Date: 13 December 1995 (13.12.95) (30) Priority Data: 2,138,061 14 December 1994 (14.12.94) CA (71) Applicant (for all designated States except US): NEWBRIDGE NETWORKS CORPORATION [CA/CA]; 600 March Road, P.O. Box 13600, Kanata, Ontario K2K 2E6 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): WOLFF, Mark [CA/CA]; 426 Fraser Avenue, Ottawa, Ontario K2A 2P9 (CA). WALL, Wayne [CA/CA]; P.O. Box 24076, Kanata, Ontario K2M 2C3 (CA). (74) Agent: MITCHELL, Richard, J.; Marks & Clerk, P.O. Box 957, Station B, Ottawa, Ontario K1P 5S7 (CA).</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: FAIR ALLOCATION OF EXCESS RESOURCES IN A COMMUNICATIONS SYSTEM

(57) Abstract

In a communications system, a method is described for controlling the excess usage of a finite resource through which information flows by a plurality of sources having an "excess" state. For each source a determination is made as to whether the source is in the excess state. If the excess information rate is less than a predetermined fair information rate, the information is passed to the resource. If the excess information rate is greater than the fair information rate, the information is discarded.

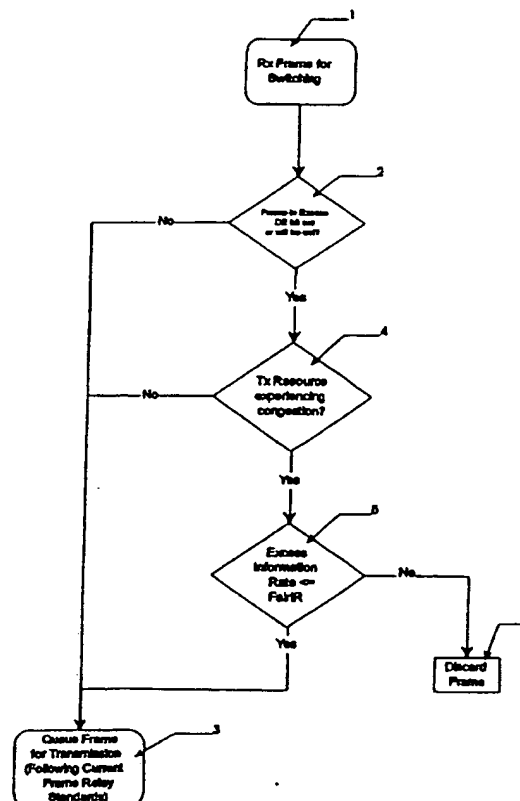

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

FAIR ALLOCATION OF EXCESS RESOURCES IN A COMMUNICATIONS
SYSTEM

This invention relates to a method of fairly
controlling the excess usage of a finite resource, for
5 example the usage of available bandwidth by permanent
virtual circuits in frame relay networks.

In frame relay networks, permanent virtual circuits
are set up through the network and frames are routed at
each node in accordance with a virtual circuit id carried
10 in the packet header. Available bandwidth is of course
determined by the physical links and as a result
congestion can occur in the network. When this happens
frame relay may discard packets, which then must be re-
transmitted.

15 Existing frame relay networks (based upon current
frame relay standards) have a problem with regards to the
way in which spare/free bandwidth is allocated. Virtual
circuits competing for excess bandwidth are not subject
to fairness. Frames received by the switching mechanism
20 are switched out to an outgoing transmit queue. If the
transmit queue is congested (i.e. virtual circuits on
that piece of bandwidth are transmitting more than the
resource can handle) then the number of frames in the
transmit queue will increase, potentially eventually
25 overflowing. Essentially, the virtual circuit
transmitting the most frames will get to consume the most
bandwidth and the most transmit and buffering resources.

Current technologies in this area rely upon the
Committed Information Rate and congestion procedures
30 defined in the ANSI specifications. These procedures
allow the user devices in a network to be policed to a
committed information Rate (CIR), but burst up to an
excess information rate (EIR). Excess burst traffic is

- 2 -

marked as excess in frame relay by setting a DE (discard eligible) bit. DE frames are discarded in preference to non DE frames.

Other situations arise where the 'excess' usage of
5 any resource by competing users needs to be controlled.

An object of the invention is to provide a method of fairly controlling the excess usage of a finite resource.

According to the present invention there is provided
10 a method of controlling, in a communications system, the excess usage of a finite resource through which traffic flows by a plurality of information sources having a committed information rate and an excess information rate, characterized in that it comprises, for each
15 source, carrying out the steps of determining whether traffic from said source is in the excess condition; determining whether the finite resource is experiencing congestion; if the result of the determination in steps a and b is positive, determining whether the excess information rate is less than a predetermined fair
20 information rate; and if the excess information rate is less than said fair information rate, passing incoming traffic to the resource, and if the current information rate is greater than said fair information rate, discarding the incoming traffic.

25 In a preferred embodiment, the method of controlling the "fair " excess information rate is based upon the "leaky bucket" approach, although other bandwidth admissions procedures can be employed. This makes the allocation of excess resources 'fair' between competing
30 virtual circuits. For example, in the case of a frame relay network, each virtual circuit runs its own instance of the described procedure.

- 3 -

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 is a flow chart illustrating the method in
5 accordance with the invention;

Figure 2 is a diagram illustrating an application of the method; and

Figure 3 illustrates a "leaky bucket" implementation of the invention.

10 Referring now to Fig. 1, this shows an approach to the problem of fair resource allocation in a frame relay network.

In Figure 1, an incoming frame Rx 1 in a frame relay network is passed to decision unit 2, which determines
15 whether the frame is in an excess condition indicated either by the DE bit being set, or by conventional frame relay information rate procedures setting the DE bit. If the frame is not in excess, it is passed to frame queue 3 for transmission over the permanent virtual channel using
20 current frame relay standards in a conventional manner. If the answer is yes, the frame is passed to decision unit 4, which determines whether the transmission resource is experiencing congestion. If no congestion is being experienced, the frame is passed to output queue 3;
25 if congestion is being experienced the frame is passed to decision unit 5. This determines whether the excess information rate is less than the Fair information rate, FairIR. If the answer is yes, the frame passed to output queue 3; if no the frame is passed to discard unit 6.

30 A Fair Burst (Bf) is defined as the number of bits in the outgoing resource (queue) that may be consumed by a virtual circuit within a time interval T. This value

- 4 -

is negotiated on a per virtual circuit basis at call set-up time. The sum of the Bf for all the permanent virtual channels on the that resource cannot normally be more than the total size of the resource. (e.g. Sum of all Bf
5 <= txQueue Size in bits)

The FairIR (Fair Information rate), which is the information rate allowed to 'leak' into the congested resource, is defined as $Bf/\Delta T$, where ΔT is the Time period over which the rate is measured. ΔT is
10 implementation dependent and usually small.

The measurement of the onset of congestion or the level of resource congestion is implementation dependent. For example, this can be achieved by monitoring the utilization of a resource and raising a congestion alarm
15 if the utilization exceeds a predetermined threshold.

Figure 2 shows a specific embodiment of the invention comprising switches 14, 15 and physical links 13, 16. Virtual circuits 10, 11, 12 compete for available bandwidth in outbound physical link 16 from switch 15.
20 Frames being switched onto physical link 16 are passed to transmit queue 3 for transmission on outbound physical link 16, which in accordance with the invention can be guaranteed to transmit some DE frames (the amount can be commissioned at call set-up based upon the PVCs Bf value)
25 while the congested bandwidth resource is congested.

In the Figure 2, virtual channels are multiplexed onto a single physical link 16 having a predetermined bandwidth. Because of the nature of frame relay, PVC 10, PVC 11, and PVC 12 can send more data than the physical
30 link 16 can handle.

In switch 15 the Tx bandwidth pipe 16 is assumed to be congested because PVC 10, PVC 11, and PVC 12 are

- 5 -

competing for finite bandwidth resources that are near depletion. In a traditional frame relay network, all three PVCs could burst beyond the negotiated Bc (burst capacity) and have their DE bits set on all excess
5 frames. The PVC sending the most frames would get preference and could 'starve' the other PVCs from getting any DE frames through. Traditional networks are usually based upon a first come, first served model.

By applying the method described above frames
10 received on PVC 10, PVC 11 and PVC 12 at Switch 15, all three permanent virtual channels can send DE frames on the congested resource, based upon Bf value for each PVC.

Figure 3 shows a "leaky bucket" implementation of the invention, which makes use of a sliding window
15 approach and is carried out on a per call basis. First, on call set up, the Fair Burst is set to Bf, which is dependent on systems resources, ΔT is initialized, and a timer is started. When the ΔT timer expires, the fair burst is set to the $[\text{Fair Burst} + (\text{FairIR} * \Delta T)]$ or Bf,
20 whichever is less and the ΔT timer restarted.

Simultaneously, the received frames are monitored to determine whether the DE bit is set, i.e. the frame is in excess. If not, the frame is passed to the transmit queue. If yes, the circuit determines whether the
25 transmit resource is congested. If not, the frame is passed to the transmit queue. If yes, the circuit then determines whether the number of bits in the frame is less than the current fair burst. If the answer is no, the frame is discarded.

30 If yes the current fair burst is set to the old fair burst - number of bits in the frame and the frame passed to the transmit queue.

- 6 -

The circuit thus operates on the credit principle. Each time the timer is re-initialized, the "credit" fair burst rate for the channel is reset. This credit is then gradually used up as excess frames are transmitted until
5 the timer expires, when the cycle repeats.

The invention thus allows PVCs 10, 11, 12 to have fair access to the physical link 16.

- 7 -

Claims:

1. A method of controlling, in a communications system, the excess usage of a finite resource through which traffic flows by a plurality of information sources
5 having a committed information rate and an excess information rate, characterized in that it comprises, for each source, carrying out the steps of:
 - a) determining whether traffic from said source is in the excess condition;
 - 10 b) determining whether the finite resource is experiencing congestion;
 - c) if the result of the determination in steps a and b is positive, determining whether the excess information rate is less than a predetermined fair information rate;
 - 15 and
 - d) if the excess information rate is less than said fair information rate, passing incoming traffic to the resource, and if the current information rate is greater than said fair information rate, discarding the incoming
20 traffic.
2. A method as claimed in claim 1, characterized in the communications system is a frame relay network, said finite resource comprises available bandwidth on an outbound physical link from a switch in said network, and
25 step a comprises determining whether a received frame for transmission on said outbound link is in an excess condition.
3. A method as claimed in claim 2, characterized in that step a comprises determining whether a discard
30 eligibility bit of a received frame is set.
4. A method as claimed in claim 2, characterized in that the non-discarded traffic is passed to a transmit queue in the resource.

- 8 -

5. A method as claimed in claim 3, characterized in that the fair information rate is defined as the number of bits (Bf) in an outgoing resource queue that can be consumed by a virtual circuit within a predetermined time interval divided by an incremental time period over which the information rate is measured, where the sum of the Bf for all channels is less than or equal to the number of bits in the transmit queue of the resource.
6. A method as claimed in claim 1, characterized in that allocation of the resource is carried out using a leaky bucket procedure.
7. A method as claimed in claim 1, characterized in that upon initiation of a call, a predetermined fair burst value (Bf) is set and a timer started, and if both the result of the determination in steps a and b is positive and the number of bits in the frame is less than the fair burst value (Bf), the fair burst value Bf is reset to the old fair burst value less the number of bits in the frame, otherwise the frame is discarded.
8. A method as claimed in claim 1, characterized in that on expiration of the timer after a predetermined period of time, the fair burst value Bf is reset so to be the lesser of the current fair burst value plus the fair information rate multiplied by said time period, and the current fair burst value.

1 / 3

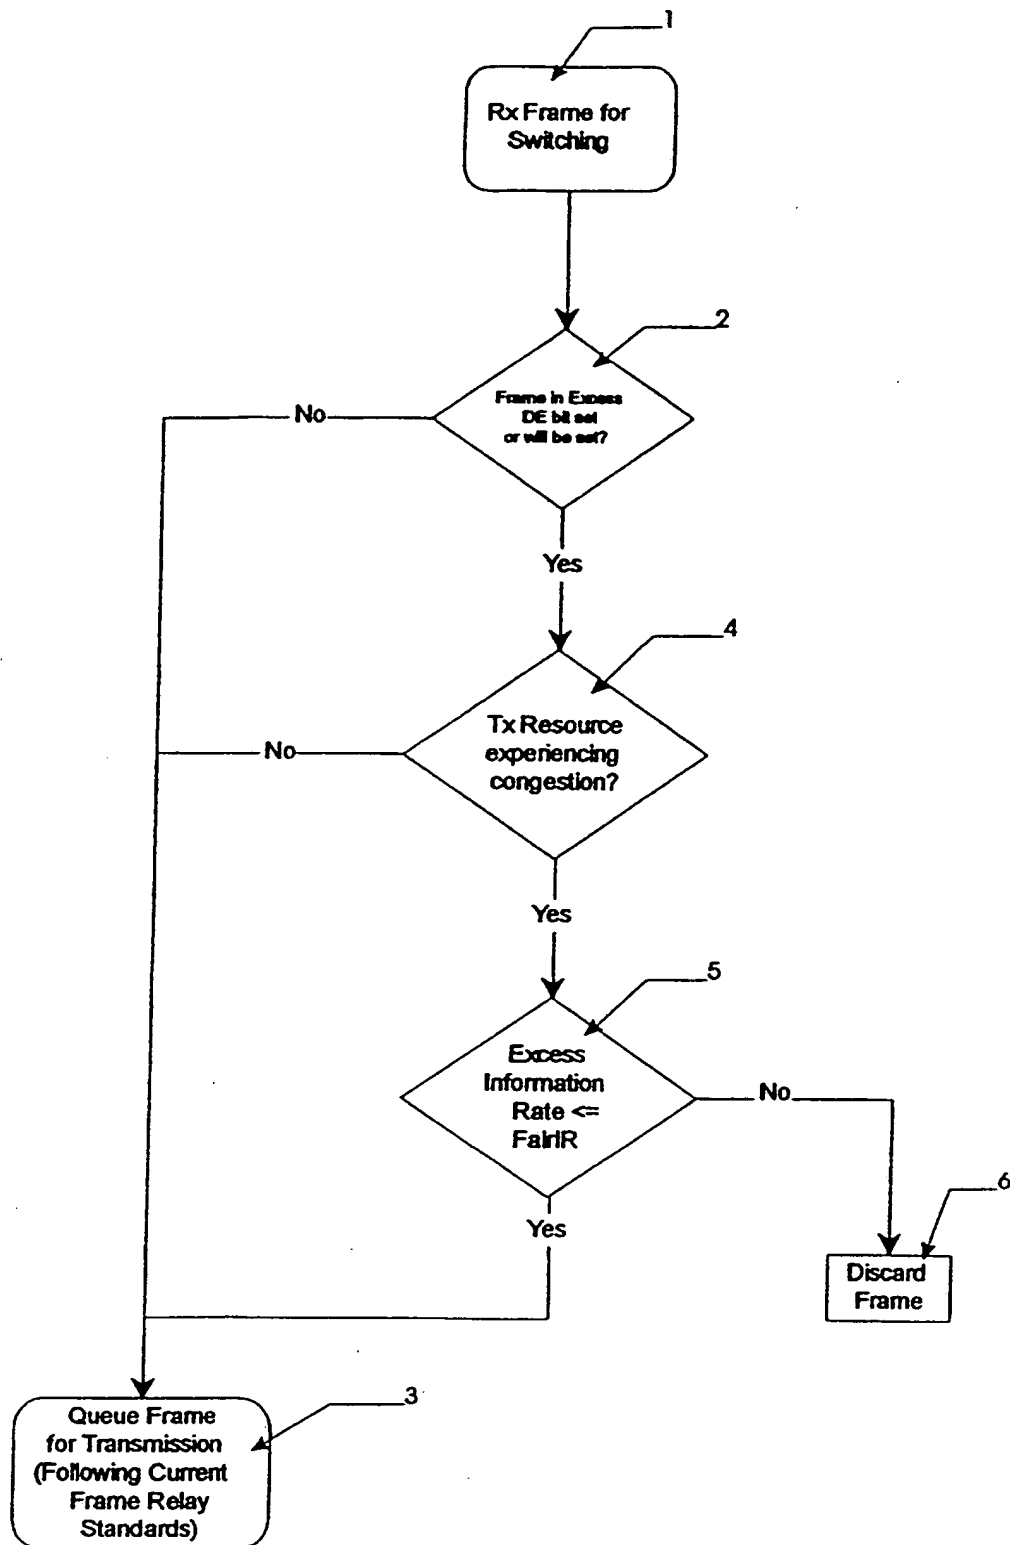


Fig. 1

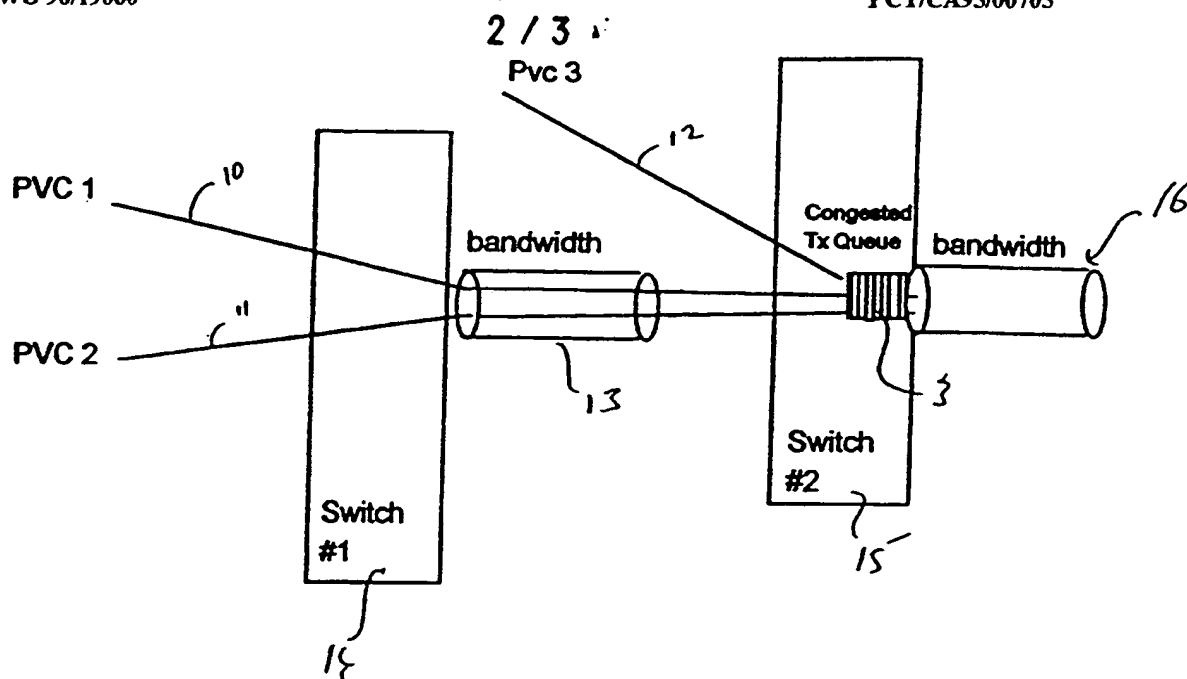


Fig. 2

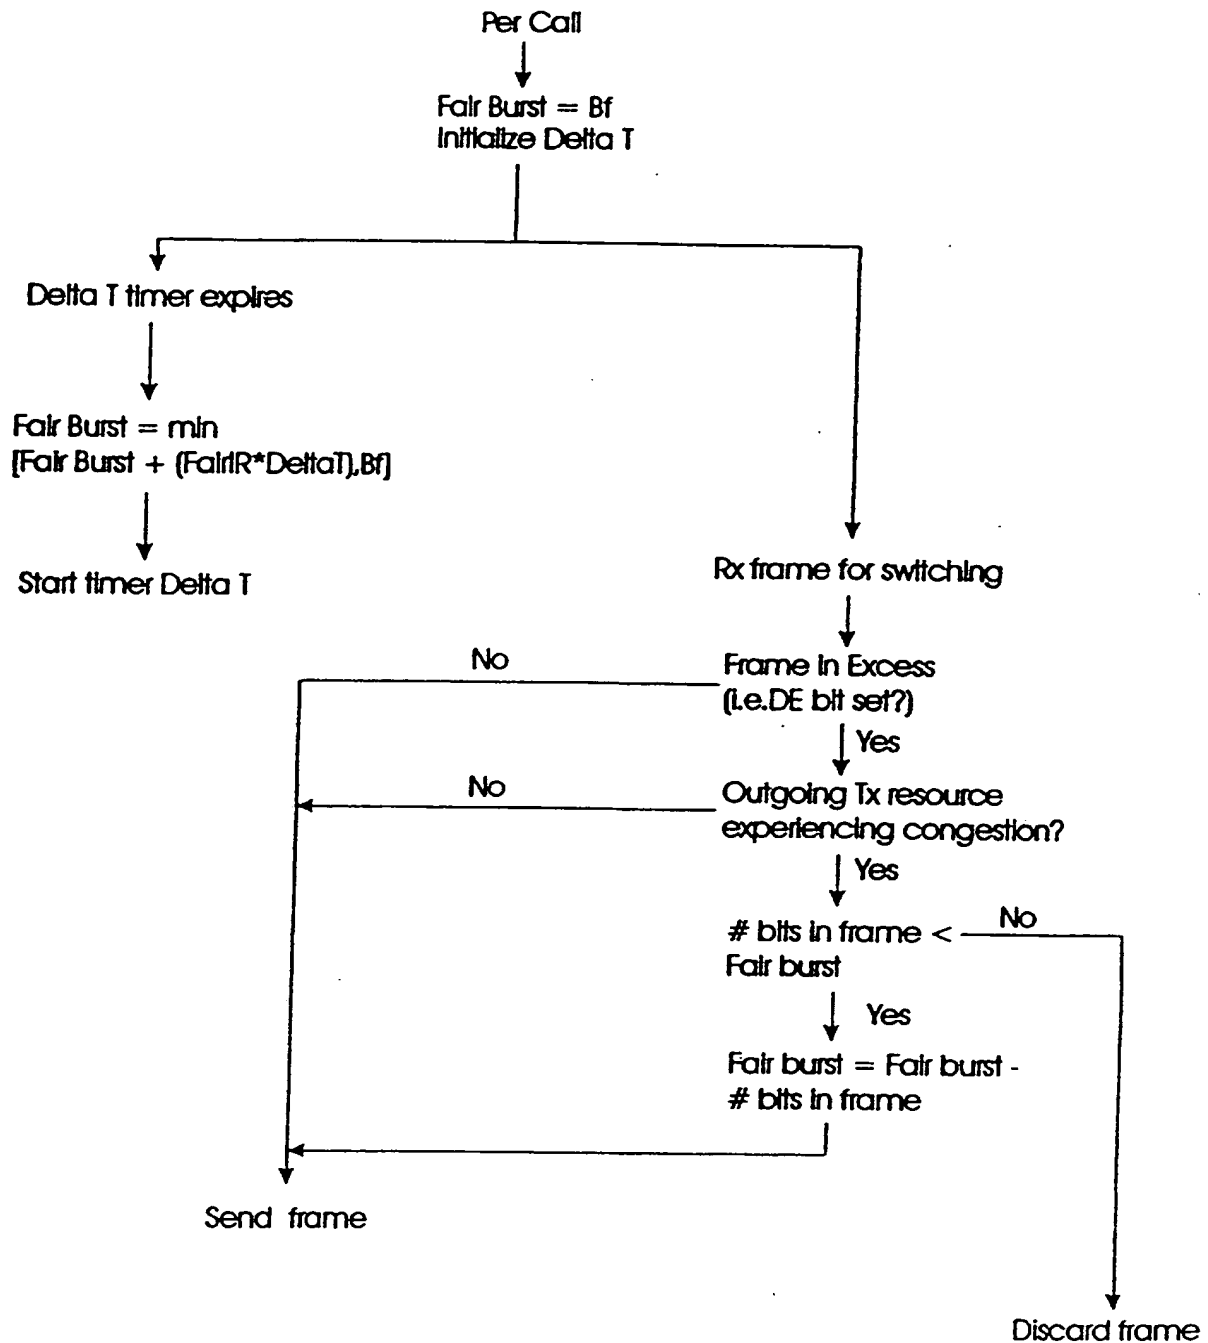


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PC 1/CA 95/00705

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CONFERENCE ON COMPUTERS AND COMMUNICATIONS, March 1991 USA, pages 539-545, XP 000299084 D.B. GROSSMAN 'An overview of frame relay technology'	1-4,6
A	see paragraph 3.1 ---	5,7,8
X	PACIFIC TELECOMMUNICATIONS CONFERENCE, vol. 1, January 1993 USA, pages 376-392, XP 000565982 K.S.R. MOHAN 'Enterprise networking using Frame Relay' see page 383, right column, line 27 - page 384, right column, line 41 --- -/--	1-4



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

25 March 1996

Date of mailing of the international search report

12. 04 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Perez Perez, J

INTERNATIONAL SEARCH REPORT

International Application No
PC 1/CA 95/00705

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>INTERNATIONAL TELETRAFFIC CONGRESS, June 1991 NL, pages 153-159, XP 000303023 B. DOSHI ET AL. 'Memory, bandwidth, processing and fairness considerations in real time congestion controls for broadband networks' see paragraph 5.2.2 -----</p>	5,7,8

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.